



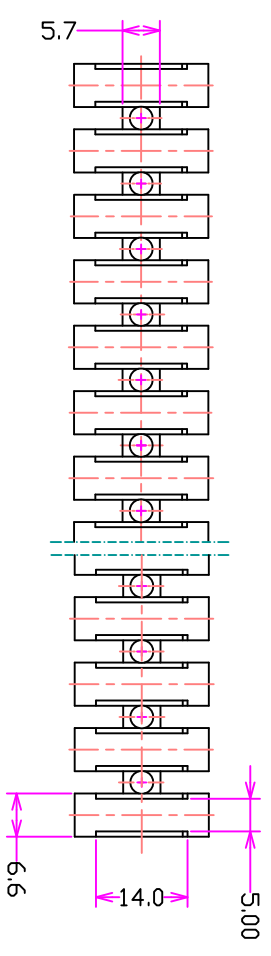
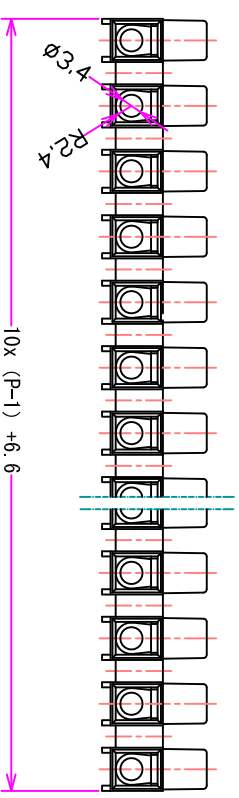


REV	Revision History	Drawing/Date	Audit/Date
A	New Issue	Chao Yu, 25/08/2014	

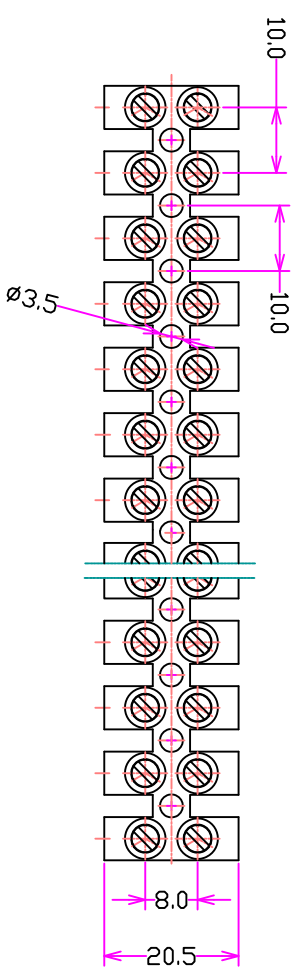

- **Material**
Screw: M3 Carbon Steel
Tin Plating
Hardware: Copper
Housing: PA66 94V-2
- **Mechanical Parameter**
Temperature: 110°C
Trim Length: 7 ~ 8mm
Torque: 0.5 N.m
Space: 10.0mm

- **Electrical Parameters**
(IEC) (UL)
Rated Voltage: 450v 600v
Rated Current: 24A 30A
Wire size: 2.5mm² 22-10AWG
Withstand Voltage: AC2500v\1Min

DIM	P											
	2	3	4	5	6	7	8	9	10	11	12	
L	16.6	26.6	36.6	46.6	56.6	66.6	76.6	86.6	96.6	106.6	116.6	
TOL(±)	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	

Without individual tolerance reference	reference				Drawing dimension Units	Product Dimension	Part No.	Scale
0.5~3	3~6	6~30	30~120	120以上				
±0.08	±0.15	±0.20	±0.30	±0.40	M	M	1:1	

Item No.	Type	Item
***	Feed Through Terminal Block	OM-10-10.0-1/2/3-XP

