


REV	修订记录	绘图/日期	审核/日期
A	新发行	余 彪/2014/08/25	

Mechanical properties

Trim length: 8~9mm
 Torque: 0.8N.m
 Pitch: 12.0mm

Electronical performance

(TEC) (UL)
 Rated Voltage: 500v 600v
 Rated Current: 41A 35A
 Wire size: 6.0mm² 22-10AWG
 Withstand Voltage: AC2500v\1Min

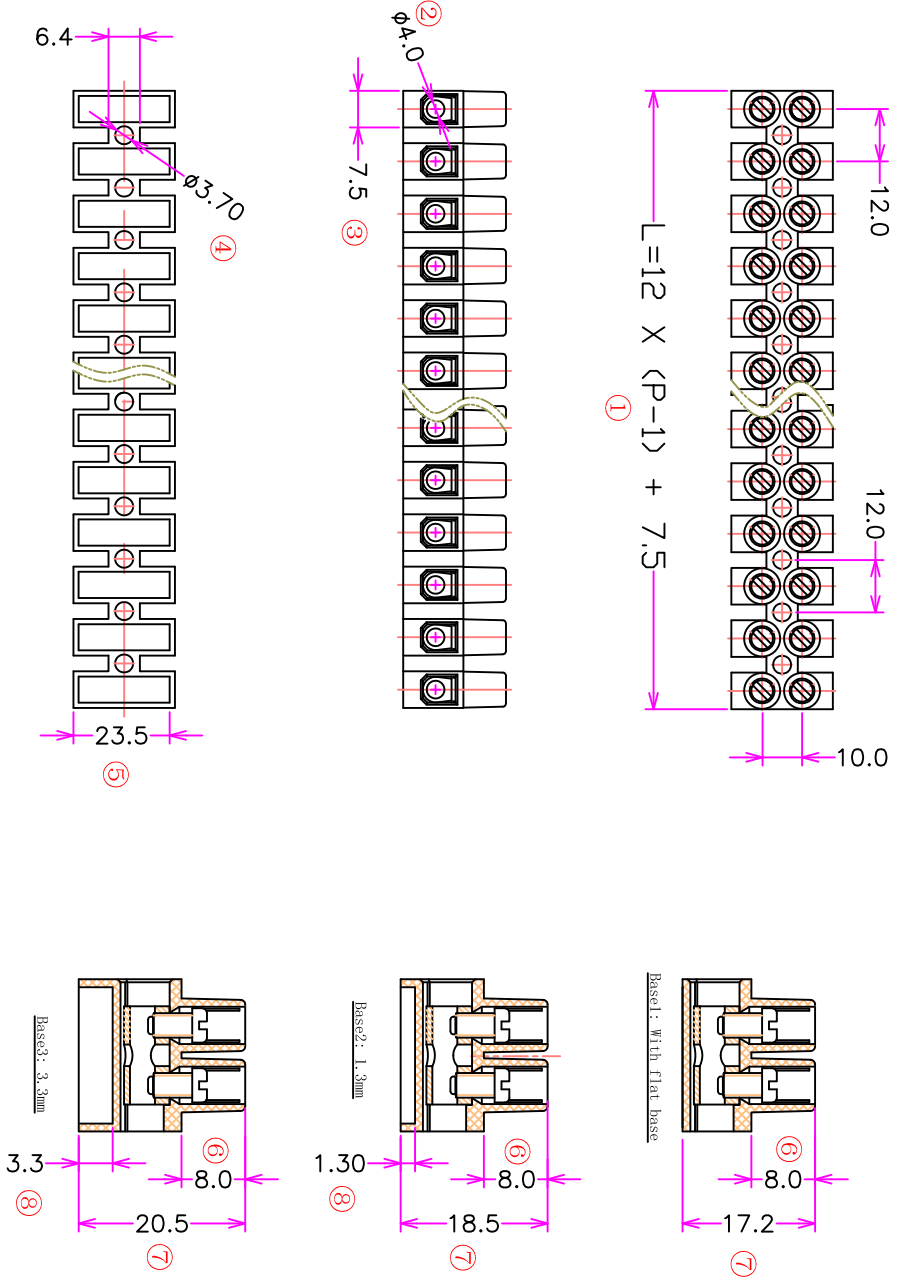

Technical requirements

The '0' character size quality control points.

DIM	P	2	3	4	5	6	7	8	9	10	11	12
L	19.5	31.5	43.5	55.5	67.5	79.5	91.5	103.5	115.5	127.5	139.5	
TOL(±)	0.10	0.16	0.22	0.28	0.34	0.40	0.48	0.52	0.58	0.64	0.70	

Without individual tolerance reference	Breaking Disposition	Projection Method	Product Feature	Part Drawing	Scale
0.5~3	3~6	6~30	30~120	>120	±0.08
±0.08	±0.15	±0.20	±0.30	±0.40	

*****	Item No.	GM-12-(1.2.3)-XXP
FUCOM-6032	Type	Feed Through Terminal Block

