

REV	Revision	Drawing/Date	Audit/Date
A	New Issue	Chao Yu 25/08/2014	

Mechanical Parameters







- Temperature range: 110°C
- Trim Length: 6~7mm
- Torque: 0.4N.m
- Space: 8.0mm

Electrical Parameters

- (IEC) (UL)
- Rated Voltage: 450v 600v
- Rated Current: 17.5A 20A
- Wire size: 1.5mm² 22-12AWG
- Withstand Voltage: AC2500v\1Min

Technical requirement

the size with 'O' is control quality

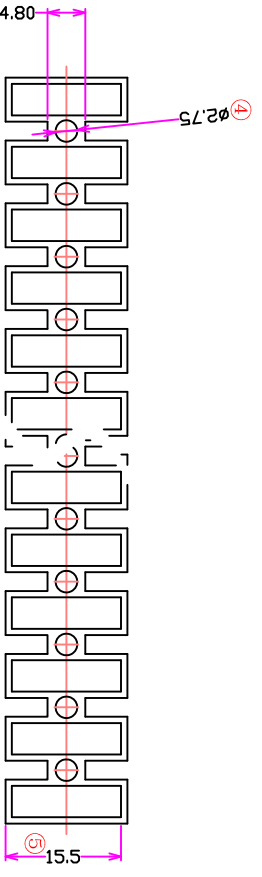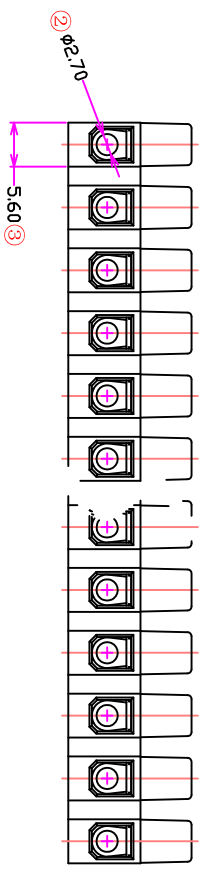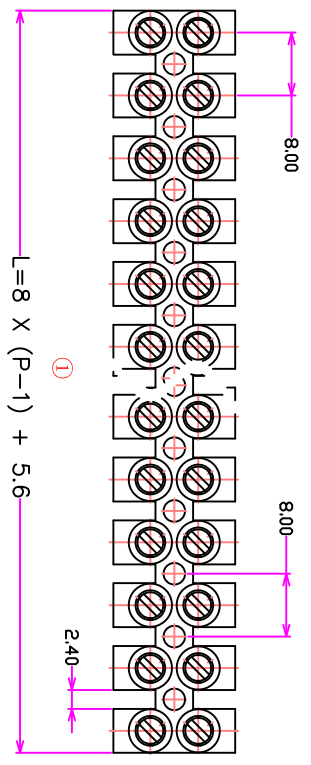

DIM	P											
	2	3	4	5	6	7	8	9	10	11	12	
L	13.6	21.6	29.6	37.6	45.6	53.6	61.6	69.6	77.6	85.6	93.6	
TOL(±)	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	

Without individual tolerance	reference
0.5~3	3~6
±0.08	±0.15
	6~30
	±0.20
	30~120
	±0.30
	>120
	±0.40

Drawing of Transmission units	Production method	Product Marking	Test Drawing No.	Scale
		III III	FUCON-6028	1:1

Item No.	Type
CM-8-(1.2.3)-XXP	Feed Through Terminal block

